


Flanged base plate connector clamps GN 171

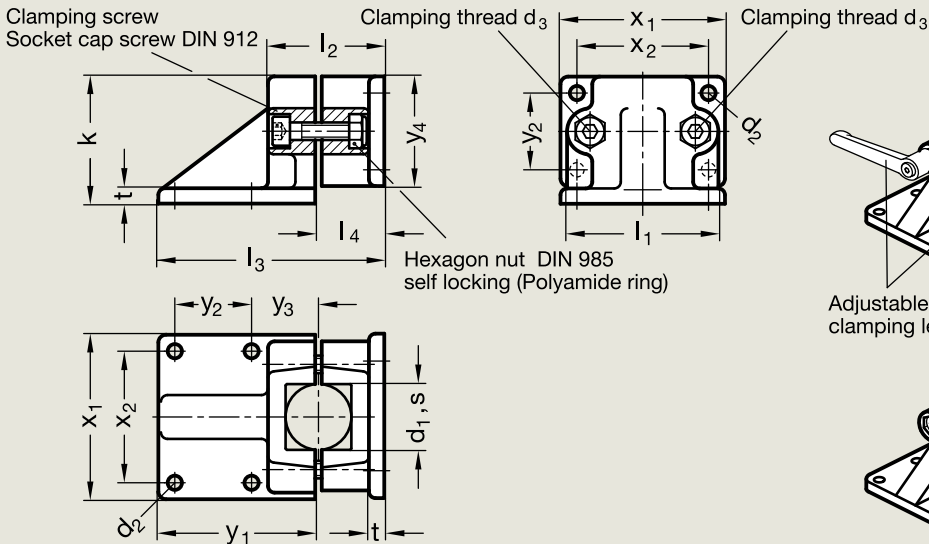

Id. no. 1 with 2 clamping screws DIN 912, zinc plated

Id. no. 2 with 2 Stainless Steel-clamping screws DIN 912

d ₁	s	d ₂	d ₃	k	l ₁	l ₂	l ₃	l ₄	t	x ₁	x ₂	y ₁	y ₂	y ₃	y ₄	Clamping lever for d ₃
Bore B	Square V		Clamping screw	Clamping length												
B 20	V 20	7	M 8	58	69	53	103	30	7	75	60	72	35	30	50	GN 911-M 8-45
B 25	V 25	7	M 8	58	69	53	103	30	7	75	60	72	35	30	50	GN 911-M 8-45
B 30	V 30	7	M 8	58	69	53	103	30	7	75	60	72	35	30	50	GN 911-M 8-45
B 40	V 40	11	M 10	91	98	82	156	47	14	115	90	108	50	45	76	GN 911-M10-70
B 42	-	11	M 10	91	98	82	156	47	14	115	90	108	50	45	76	GN 911-M10-70
B 45	V 45	11	M 10	91	98	82	156	47	14	115	90	108	50	45	76	GN 911-M10-70
B 48	-	11	M 10	91	98	82	156	47	14	115	90	108	50	45	76	GN 911-M10-70
B 50	V 50	11	M 10	91	98	82	156	47	14	115	90	108	50	45	76	GN 911-M10-70

Specification

- ▶ Aluminium plastic coated black **SW** RAL 9005 textured finish
- blank **BL** matt shot-blasted
- ▶ Clamping bores not machined
- ▶ Socket cap screws DIN 912 Steel zinc plated / St. Steel German material No. 1.4301
- ▶ Hexagon nuts DIN 985 Steel zinc plated / St. Steel German material No. 1.4301
- ▶ Adjustable clamping lever GN 911 Zinc die casting Inserts / Distance bushings Stainless Steel German Material No. 1.4305 page 63

Information

The clamping bores of the flanged base plate connector clamps GN 171 (photo page 22) are not machined and designed for construction tubings GN 990 or DIN 2391, DIN 2395 and DIN 2462 respectively.

The standard clamping bolts are socket cap screws DIN 912. They can be replaced by adjustable clamping levers GN 911 (see table of dimensions).

Construction tubings GN 990

page 59

How to order

Flanged base plate connector clamp GN 171-B45-1-BL

NCode No. | | |
d₁ (s) | | |
Id. No. | | |
Finish | | |

Adjustable clamping levers GN 911 have to be ordered separately. They are supplied disassembled.