


Plunger retracted

Assembly example

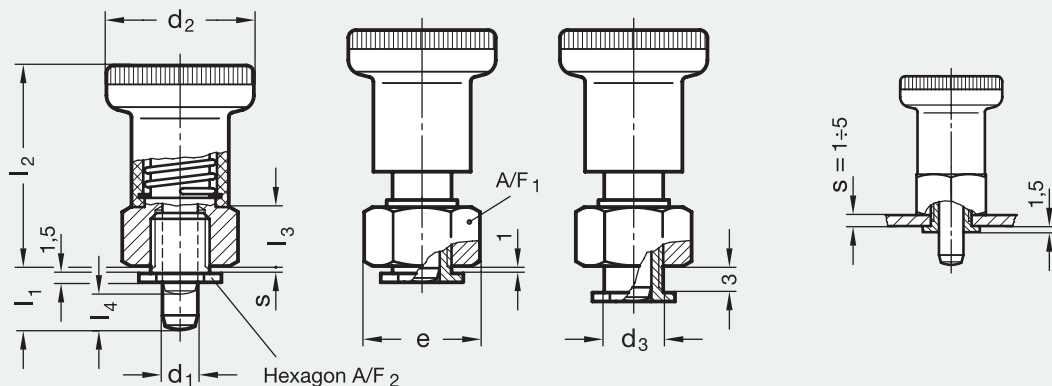

d <sub>1</sub> Plunger -0,02 -0,04 Bore G7	l <sub>1</sub>		d <sub>2</sub>	d <sub>3</sub>	e	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub> Stroke	s Clamping distance	A/F <sub>1</sub>	A/F <sub>2</sub>	Spring load N ≈		Axial load [N]
	initial	end												
6	8,5	10,5	25	10	19,5	34	10	6	1÷ 5	17	14	8,5	22	400
8	10	12	31	12	22	40	12	7,5	1÷ 5	19	16	15,5	28	500

### Specification

Steel **ST**  
zinc plated, blue passivated

Plunger  
Stainless Steel  
German Material No. 1.4305  
chemically nickel plated

Knob  
Plastic (Polyamide PA)  
black matt finish  
not removable

ISO-Fundamental  
Tolerances Page 888

Stainless Steel  
characteristics Page 894


### Information

Indexing plungers GN 607.2 (photo page 407) have been developed for installation in thin walled equipment.

It has to be taken into consideration that, depending on the mounting plate thickness „s“, the protruding plunger length „l<sub>1</sub>“ and the position of the hexagon nut on its centre bush, the plunger nose might not always be fully retractable.

For design reasons the positional accuracy of this indexing plunger is not as precise as plunger GN 607.

A double ring spanner (1 mm thick zinc plated sheet steel) for installing this indexing plunger GN 607.2 is available under code No.:



Double ring spanner  
GN 607.9-SW14-SW16

Indexing plungers GN 607  
(Steel or Stainless Steel)

Page 408

### How to order

Indexing plunger  
GN 607.2-6-10,5-ST

Code No.	d <sub>1</sub>	l <sub>1</sub>	Steel
----------	----------------	----------------	-------