
 Type **ASD** Clamping by turning handle to the right

 Type **ASS** Clamping by turning handle to the left

Size	F _H [N] Holding force	a	b	d ₁	d ₂	d ₃	d ₄	h ₁ ≈	h ₂
50	800	10	18	6,5	M 4	12	4,3	46	30,5

Size	l ₁	l ₂ ≈	l ₃	l ₄	m ₁	m ₂	m ₃	t	w Stroke
50	73	65	32	21	16	16	8	9	16

Specification

Parts in sheet metal toughened steel C 10
German Material No. 1.0301
zinc plated, blue passivated

Plunger in steel St 37
German Material No. 1.0037
zinc plated, blue passivated

Guide bush in steel St 37
German Material No. 1.0037
zinc plated, blue passivated

All moving parts lubricated
with special grease

Solid moulded plastic handle
sleeve, red, oil resistant

Information

Plunger operated clamps GN 840 are known for their extremely low height irrespective of the position of the operating handle.

*General information
for toggle clamps*


Page 574 / 575

How to order

Plunger clamp GN 840-50-ASD

Code No.			
Size			
Type			

Clamping bolts to be ordered separately; see pages 642 to 646.

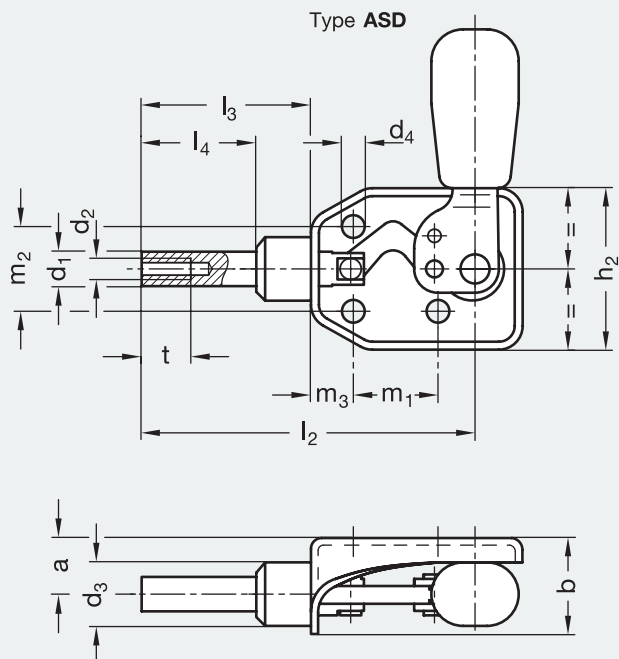

Type **ASS** is mirror image of type ASD

